

05/19/00
J0335 U.S. PTO

UNITED STATES PATENT APPLICATION TRANSMITTAL FORM

Box: NEW PATENT APPLICATION
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Docket No.: 872.8708 USU

10714 U.S. PTO
09/575033
05/19/00

"Express Mail" mailing label number: EL 522 868 511 US
Date of Deposit: May 19, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and addressed to the Asst. Commissioner for Patents, Washington, D.C. 20231.

Joanne A Romaniello
(Name of person mailing paper)

Joanne A Romaniello
(Signature of person)

Sir:

Transmitted herewith for filing is the patent application of

Inventors: **Kari Jyrkkä**
Pekka Möttönen

For: **ENHANCEMENTS TO THE 3-CARRIER COMPACT SOLUTION FOR IS-136HS**

Enclosed are:

- Declaration and Power of Attorney and an Associate Power of Attorney;
- X 12 pages of Specification, 2 pages Claims, 1 page of Abstract; and 8 pages of Appendix A;
- X 2 sheet of drawings;
- An Assignment of the invention to: **Nokia Mobile Phones Limited, Espoo, FINLAND**, will follow;
- Information Disclosure Statement (and Form PTO-1449 with copies of cited documents);
- X Priority of Provisional Application No. **60/136,494**, filed on **May 28, 1999** is herewith claimed under 35 U.S.C. §119(e).

The Filing Fee (large entity) is calculated below.

CLAIMS AS FILED

(1) For	(2) Number Filed	(3) Number Extra	(4) Rate	(5) Basic Fee \$690.00
Total Claims	9 - 20 =	0	\$ 18.00	\$ 0
Independent Claims	2 - 3 =	0	\$ 78.00	\$ 0
Assignment Recordal Fee:				\$ 0
TOTAL FILING FEE				\$690.00

X A check in the amount of \$690.00 in payment of the filing fee is enclosed.

Charge \$ _____ to Deposit Account No. 01-0467.


Fee Deficiency: The Commissioner is hereby authorized to charge any additional fees under 37 C.F.R. 1.16 and 1.17 which may be required for this communication or during the entire pendency of this patent application, or credit any overpayment, to Deposit Account No. 01-0467.

Address all future communications to:

Harry F. Smith, Esq.
OHLANDT, GREELEY, RUGGIERO & PERLE, L.L.P.
One Landmark Square
Suite 903
Stamford, CT. 06901

Direct phone calls to Harry F. Smith at (203) 327-4500

5/19/2000
Date of Signature



Harry F. Smith, Esq.
Attorney for Applicant(s)
Ohlandt, Greeley, Ruggiero & Perle
Registration No. 32,493
(203) 327-4500

00575923-051900

EXPRESS MAIL NO.: EL 522 868 511 US

Nokia Mobile Phones Limited Docket No.:

NC 24774

Ohlandt, Greeley, Ruggiero & Perle, L.L.P. Docket No.:

5 872.8708 USU

Patent Application Papers of: Kari Jyrkkä

Pekka Möttönen

**ENHANCEMENTS TO THE 3-CARRIER COMPACT
SOLUTION FOR IS-136HS**

10 **CLAIM OF PRIORITY FROM A COPENING PROVISIONAL PATENT
APPLICATION:**

Priority is herewith claimed under 35 U.S.C. §119(e) from
copening Provisional Patent Application No.: 60/136,494,
filed 05/28/99, entitled "ENHANCEMENTS TO THE 3-CARRIER
15 COMPACT SOLUTION FOR IS-136HS", by Kari Jyrkkä and Pekka
Möttönen. The disclosure of this Provisional Patent
Application is incorporated by reference herein in its
entirety.

FIELD OF THE INVENTION:

20 This invention relates generally to wireless communication
systems and terminals and, in particular, to the
integration of various types of wireless communication
networks having differing channel width, spacing and
bandwidth requirements. With even greater specificity, the
25 teachings of this invention relate to a narrowband
deployment of a Global System for Mobile Communications
(GSM)-based network.

BACKGROUND OF THE INVENTION:

As an example of a narrowband deployment with a GSM-based
30 network, a proposed standard for IS-136HS integrates 200kHz

09575033-051900

006150-EE052560

GSM-like carriers with the current IS-136 TDMA system, with a 1MHz initial deployment. General reference to GSM carriers, networks and mobile stations can be had by referring to "The GSM System for Mobile Communications", by Michel Mouly and Marie-Bernadette Pautet, 1992, the disclosure of which is incorporated by reference in its entirety.

One attractive solution would be to use the nearly completed specification, at the time of filing of the Provisional Patent Application, for Enhanced General Packet Radio Services, or EGPRS having 8-PSK modulation plus General Packet Radio Services (GPRS) packet data channels, from GSM/ETSI. This would save a considerable amount of specification work by adapting the work already done for the GSM 200kHz carrier. However, at least some network operators have expressed a preference to make the initial 200kHz deployment using a very narrow bandwidth (1MHz), whereas currently used GSM systems require at least 2.5MHz bandwidth. This is because each cell in a GSM system must transmit a high power, continuous Broadcast Control Channel (BCCH) signal. A mobile station or terminal (e.g., a GSM cellular telephone) uses the BCCH transmission for synchronization and neighbor cell channel monitoring purposes. In addition, all of the network parameters as well as the paging messages are received from the BCCH carrier.

Those skilled in the art will appreciate that the interference from these continuously transmitted BCCH carriers must be somehow reduced, otherwise the introduction of a 200kHz network into a 1MHz bandwidth system is very difficult or technically impossible.

A 3-Carrier Compact Solution was adopted at a UWCC.GTF.PDFG/RF-group meeting 13-15.5.99 in Monterey

(UWCC.GTF.PDFG/99.04.13.38, 3-Carrier Compact Proposal). The 3-Carrier Compact Solution is a proposal for IS-136HS that maintains a spectrum deployment below 1MHz. The general idea is to use three carriers (600kHz) in a 1/3 reuse, but to achieve 9 or 12 reuse for control channels by using a 200kHz synchronous network. The 3-Carrier Compact Solution was presented to ETSI during a Paris EDGE SMG workshop (Tdoc SMG2 EDGE 122/99, Tdoc SMG2 EDGE 152/99, Tdoc SMG2 EDGE 153/99). Reference in this regard can be had to Appendix A of the above-referenced Provisional Patent Application No.: 60/136,494, filed 05/28/99.

In this proposal the control channel is discontinuously transmitted. As a result, the neighbor channel measurements and neighbor cell base station identity (BSIC) decoding become more difficult when the mobile station is in a traffic mode. However, the IS-136HS compact was developed for GPRS traffic only and, therefore, the mobile station neighbor channel measurement and BSIC decoding capabilities were viewed as sufficient for packet-only services.

However, the inventors have analyzed the neighbor channel measurement and neighbor channel BSIC decoding capability of the 3-Carrier Compact Solution. The results of this analysis are presented in Appendix B of the above-referenced Provisional Patent Application No.: 60/136,494, filed 05/28/99, which has been incorporated by reference herein in its entirety. In brief, the analysis shows that the 3-Carrier Compact Solution proposal has serious problems with delay critical services (including both circuit switched and packet switched services) when the mobile station must handle both uplink and downlink transactions during each GSM TDMA frame. In this case there will be only certain neighbor channel measurement and BSIC decoding positions where the mobile station is able to "see" the neighbor cell signal. Therefore, it has been

- discovered that the mobile station will not be able to measure a sufficient number of neighbor cells, and will not be able to see a neighbor cell BSIC, without dropping some circuit switched traffic bursts. The necessity to drop
- 5 traffic bursts in order to make neighbor cell channel measurements is obviously an undesirable solution for a number of reasons.

OBJECTS AND ADVANTAGES OF THE INVENTION:

- 10 It is a first object and advantage of this invention to facilitate the introduction of a 200kHz GSM-type network into a system having a bandwidth that is substantially less than the 2.5MHz bandwidth normally employed for GSM-type networks.

- 15 It is a second object and advantage of this invention to provide an improved and enhanced 3-Carrier Compact Solution.

SUMMARY OF THE INVENTION

- 20 The foregoing and other problems are overcome and the objects and advantages are realized by methods and apparatus in accordance with embodiments of this invention, wherein enhancements are made to the 3-Carrier Compact Solution.

- 25 More specifically, the mobile station's capability to see (i.e., receive) neighbor cell signals, when in the traffic mode, is improved by the teachings of this invention. This enhancement makes circuit switched services technically feasible to implement, as the mobile station is enabled to see of all the neighboring channel signals when in the traffic mode. That is, the mobile station can make a
- 30 sufficient number of measurements from each neighbor

09575037-051900

channel, and can also decode all neighbor channel BSICs, without dropping traffic bursts.

00010-225259
09/25/03-051900

A method in accordance with this invention thus enables the introduction of a 200kHz GSM-type network into a TDMA system having a bandwidth that is substantially less than a 2.5MHz bandwidth normally employed for GSM-type networks. The method has steps of providing a 52-multiframe that contains 12 blocks of four consecutive frames, two idle frames, and two channels used for the Packet Timing advance Control Channel (PTCCH); and rotating the control channels belonging to a serving time group over odd timeslot numbers as 7, 5, 3, 1, 7, 5, ..., etc. The rotation occurs between frame numbers $(FN) \bmod 52 = 3$ and 4. The packet switched logical channels Packet Data Traffic Channel (PDTCH), Packet Associated Control Channel (PACCH) and PTCCH are preferably not rotated.

The control channel rotation in accordance with this invention makes the mobile station cell reselection measurements possible during the traffic state, even in the case of a discontinuously transmitted control channel. This is because each neighbor cell control channel signal is caused to rotate periodically into the mobile station's neighbor cell measurement window. Traditionally, when the mobile station is involved with traffic it is constrained to receive and transmit bursts in fixed positions, and thus there is a limited neighbor cell measurement window after a transmission burst (TX) and before the next reception period (RX). In the conventional implementation the discontinuously transmitting control channel was at a fixed location, and thus the mobile station was not able to receive signals from all neighbor cells, when involved in traffic, without dropping some traffic.

BRIEF DESCRIPTION OF THE DRAWINGS

The above set forth and other features of the invention are made more apparent in the ensuing Detailed Description of the Invention when read in conjunction with the attached Drawings, wherein:

Fig. 1 is a block diagram of a mobile telecommunications system, having packet data capabilities, that is suitable for practicing this invention;

Fig. 2 illustrates the format of radio blocks in a 52 TDMA multiframe; and

Fig. 3 shows the mapping of logical channels onto physical channels.

DETAILED DESCRIPTION OF THE INVENTION

Referring to Fig. 1, there is illustrated a simplified block diagram of an embodiment of an exemplary wireless telecommunications system 1 that includes a plurality of mobile stations 10. Two mobile stations (MSs) are shown in the Figure, with one being designated MS#1 and the other MS#2. Fig. 1 also shows an exemplary network operator 2 having, for example, a mobile switching center (MSC) 3 for connecting to a telecommunications network, such as the Public Switched Telephone Network or PSTN, at least one base station controller (BSC) 4, and a plurality of base transceiver stations (BTS) 5 that transmit in a forward or downlink direction both physical and logical channels to the mobile stations 10 in accordance with a predetermined air interface standard. It is assumed that a reverse or uplink communication path exists from the mobile station 10 to the network operator, which conveys mobile originated access requests and traffic, including packet data traffic

in accordance with an aspect of these teachings.

- In the presently preferred, but not limiting, embodiment of these teachings, the air interface standard conforms to a
- 5 Time Division Multiple Access (TDMA) air interface and to the EGPRS protocol.

- The network operator 2 can include Message Service Center (MSCT) that receives and forwards messages for the mobile stations 10, such as Short Message Service (SMS) messages,
- 10 or any wireless messaging technique including e-mail and Supplementary Data Services. Furthermore, enhancements to SMS can be used, such as one under development and known as Multimedia Messaging Service (MMS), wherein image messages,
- 15 video messages, audio messages, text messages, executables and the like, and combinations thereof, can be transferred between a network and a mobile station.

- The mobile station 10 typically includes a microcontrol unit (MCU) 12 having an output coupled to an input of a display 14 and an input coupled to an output of a keyboard
- 20 or keypad 16. The mobile station 10 may be considered to be a handheld radiotelephone, such as a cellular telephone or a personal communicator, and may have a microphone and a speaker (not shown) for conducting voice communications. The mobile station 10 could also be contained within a card
- 25 or module that is connected during use to another device. For example, the mobile station 10 could be contained within a PCMCIA or similar type of card or module that is installed during use within a portable data processor, such as a laptop or notebook computer, or even a computer that
- 30 is wearable by the user.

The MCU 12 is assumed to include or be coupled to some type of a memory 13, including a read-only memory (ROM) for storing an operating program, as well as a random access

09575033.051900

memory (RAM) for temporarily storing required data, scratchpad memory, received data packets and data packets prepared for transmission, etc. A separate, removable SIM (not shown) can be provided as well, the SIM storing, for example, a preferred Public Land Mobile Network (PLMN) list and other subscriber-related information. The ROM is assumed, for the purposes of this invention, to store a program enabling the MCU 12 to execute the software routines required to operate in accordance with the presently preferred packet data protocols and procedures.

The mobile station 10 also contains a wireless section that includes a digital signal processor (DSP) 18, or equivalent high speed processor, as well as a wireless transceiver comprised of a transmitter 20 and a receiver 22, both of which are coupled to an antenna 24 for communication with the network operator 1.

A description is now given of a presently preferred enhancement to the 3-Carrier Compact Solution in accordance with an aspect of this invention, wherein time groups on each carrier are rotated. For example, a given one of the BTS 5 transmits/receives its control channel on frequency 1 at timeslot 7, and during the next 52-multiframe period the base station shifts its control channel transmission/reception to timeslot 5. This rotation continues multiframe by multiframe as, for this example, 7,5,3,1, 7,5,3,1, 7..., etc. The other three BTSs 5 which are transmitting their control channels on the same frequency 1 are also rotating their control channel positions by one timeslot relative to each other.

A method has a first step of providing a 52-multiframe that contains 12 blocks of four consecutive frames, two idle frames, and two channels used for the Packet Timing advance Control Channel (PTCCH), as is shown in Fig. 2. A block

09575033-051900

allocated to a given logical channel comprises one radio block or, in the uplink direction only, four random access bursts. The type of channel may vary on a block by block basis. Fig. 3 shows the frame numbers for each of the blocks (B0...B11) transmitted in the multiframe. The ordered list of blocks is defined as B0, B6, B3, B9, B1, B7, B4, B10, B2, B8, B5, B11. In the downlink direction, the logical channel type is indicated by the message type contained in the block header.

10 For the Compact solution of most interest to this invention, timeslot mapping and rotation of control channels is used such that, for a next step of the method, the control channels belonging to a serving time group are rotated over every other timeslot number. In a preferred
15 embodiment of this invention the rotation occurs over odd timeslot numbers. In a most preferred embodiment of this invention the rotation occurs over odd timeslot numbers as 7, 5, 3, 1, 7, 5, ..., etc. The rotation occurs between frame numbers (FN) mod 52 = 3 and 4. The packet switched
20 logical channels Packet Data Traffic Channel (PDTCH), Packet Associated Control Channel (PACCH) and PTCCH are preferably not rotated.

The mapping of the control channels on timeslot numbers is defined by the following formula:

25 For $0 \leq \text{FN mod } 52 \leq 3$, $\text{TN} = ((6 \times ((\text{FN div } 52) \text{ mod } 4)) + 1 + (2 \times \text{TG})) \text{ mod } 8$; and
For $4 \leq \text{FN mod } 52 \leq 51$, $\text{TN} = ((6 \times ((\text{FN div } 52) \text{ mod } 4)) + 7 + (2 \times \text{TG})) \text{ mod } 8$.

30 The control channel rotation in accordance with this invention makes the mobile station cell reselection measurements possible during the traffic state, even in the case of a discontinuously transmitted control channel. This is because each neighbor cell control channel signal is

006150-2E05Z560

caused to rotate periodically into the mobile station's neighbor cell measurement window. Traditionally, when the mobile station is involved with traffic it is constrained to receive and transmit bursts in fixed positions, and thus there is a limited neighbor cell measurement window after a transmission burst (TX) and before the next reception period (RX). In the conventional implementation the discontinuously transmitting control channel was at a fixed location, and thus the mobile station was not able to receive signals from all neighbor cells, when involved in traffic, without dropping traffic.

One benefit from the control channel rotation is that the mobile station can see all the neighbors in its neighbor monitoring window, and is also able to decode all the neighbor BSICs regardless of the slots where the mobile station traffic is located. Therefore, the use of the rotating control channel enables the 3-Carrier Compact Solution to support circuit switched services on four timeslots which are not occupied for control channel usage. Another benefit of the base station control channel rotation is that the mobile station measurement implementation can be more readily performed, since the mobile station now sees all the neighbor base stations in its measurement window. A further benefit is that the network 1 is not required to organize idle periods for the mobile station 10 so that the mobile station would be enabled to perform cell reselection measurements during traffic times. Also, delay critical services (e.g., circuit switched voice over IP) are made possible, since the mobile station is not required to drop traffic to make neighbor cell reselection measurements. The mobile station 10 is also enabled to decode the BSIC from each neighbor cell during traffic, which is essential so that the mobile station is enabled to identify the neighbor cell before making a reselection to that cell.

5 The Appendix A to this patent application shows examples of the utility of the teachings of this invention. Appendix A is identical to Annex D of a draft document ETSI EN 300 908 V8.3.0 (2000-01), Digital cellular telecommunications system (Phase 2+); Multiplexing and multiple access on the radio path (GSM 05.02 version 8.3.0 Release 1999). The content of this draft document is incorporated by reference herein in its entirety.

10 In the presently preferred embodiment the Packet Synchronization Channel (PSCH) is used to signal the rotation direction (and current rotation position) of the control channel to the mobile station 10.

15 More particularly, a Compact Synchronization Channel (CSCH) is arranged to contain two encoded parameters. The first parameter is the Base Transceiver Station 5 identity code (BSIC) which is six bits (before channel coding) having three bits of PLMN color code with a range of 0-7, and three bits of BS color code with range of 0-7, as defined in GSM 03.03. The second parameter is a Reduced TDMA frame number (RFN) which is 19 bits (before channel coding), arranged as follows:

20 R1 (10 bits) range 0-1023 = $FN \div (51 \times 52)$;
R2 (6 bits) range 0-50 = $(FN \div 52) \bmod 51$;
TG (2 bits) range 0-3; and
25 1 reserved bit; where
FN = TDMA Frame Number, as defined in GSM 05.02, subclause 4.3.3;
TG = Time Group as defined in GSM 05.02, subclause 4.3.4.

30 GSM 04.06 and GSM 04.08 specify the precise bit ordering, GSM 05.03 specifies the channel coding of the above parameters, and GSM 05.10 defines how the TDMA FN can be calculated from R1 and R2. The disclosures of the various GSM documents are incorporated by reference herein in their

0575037-051900

entireties.

Those skilled in the art may derive other suitable information encoding and signalling techniques when guided by the foregoing teachings.

- 5 Thus, while the invention has been particularly shown and described with respect to preferred embodiments thereof, it will be understood by those skilled in the art that changes in form and details may be made therein without departing from the scope and spirit of the invention.

057503-051900

COMPACT multiframe structure examples

In the figures, the 52-multiframe number (MFN) shall have a range of 0 to 3 and can be calculated from the TDMA frame number (FN) as follows:

$$MFN = (FN \text{ div } 52) \bmod 4$$

For COMPACT, timeslot mapping and rotation of the control channels is used such that control channels belonging to a serving time group are rotated over odd timeslot numbers as follows: 7, 5, 3, 1, 7, 5, ... The rotation occurs between frame numbers $(FN) \bmod 52 = 3$ and 4. The timeslot mapping and rotation of the control channels in this manner allows the mobile station to measure the received signal level from surrounding cells in its normal measurement window. Since the rotation repeats itself every 208 frames, the 52-multiframe number (MFN) allows the mobile station to determine its location in the time group rotation during selection and re-selection.

The following relates to Figures D.1 through D.7:

- i) $B(x)^y$ = time group y uses CPBCCH in block x.
- ii) $C(x)^y$ = time group y uses CPCCCH in block x.
- iii) PTCCH = PTCCH as normal
- iv) $CFCCH^y$ = time group y uses CFCCH.
- v) $CSCH^y$ = time group y uses CSCH.
- vi) IDLE = idle burst.
- vii) X^y = block designated as idle for time group y.
- viii) Empty = used for traffic as normal.

05/503.051900

Frames 0-51 of a 208-multiframe										Frames 0-51 of a 208-multiframe										Frames 0-51 of a 208-multiframe										Frames 0-51 of a 208-multiframe									
MFN = 0										MFN = 0										MFN = 0										MFN = 0									
TG = 0										TG = 1										TG = 2										TG = 3									
TS	0	1	2	3	4	5	6	7		TS	0	1	2	3	4	5	6	7		TS	0	1	2	3	4	5	6	7		TS	0	1	2	3	4	5	6	7	
FN										FN										FN										FN									
0	B(0) ¹	X ¹	X ²	X ³	X ⁴					0	X ¹	B(0) ¹	X ²	X ³	X ⁴					0	X ¹	X ¹	X ¹	X ¹	B(0) ¹	X ¹		0	X ¹	X ¹	X ¹	X ¹	B(0) ¹						
1	B(0) ¹	X ¹	X ²	X ³	X ⁴					1	X ¹	B(0) ¹	X ²	X ³	X ⁴					1	X ¹	X ¹	X ¹	X ¹	B(0) ¹	X ¹		1	X ¹	X ¹	X ¹	X ¹	B(0) ¹						
2	B(0) ¹	X ¹	X ²	X ³	X ⁴					2	X ¹	B(0) ¹	X ²	X ³	X ⁴					2	X ¹	X ¹	X ¹	X ¹	B(0) ¹	X ¹		2	X ¹	X ¹	X ¹	X ¹	B(0) ¹						
3	B(0) ¹	X ¹	X ²	X ³	X ⁴					3	X ¹	B(0) ¹	X ²	X ³	X ⁴					3	X ¹	X ¹	X ¹	X ¹	B(0) ¹	X ¹		3	X ¹	X ¹	X ¹	X ¹	B(0) ¹						
4										4										4									4										
5										5										5									5										
6										6										6									6										
7										7										7									7										
8										8										8									8										
9										9										9									9										
10										10										10									10										
11										11										11									11										
12										12										12									12										
13										13										13									13										
14										14										14									14										
15										15										15									15										
16										16										16									16										
17										17										17									17										
18										18										18									18										
19										19										19									19										
20										20										20									20										
21										21										21									21										
22										22										22									22										
23										23										23									23										
24										24										24									24										
25										25										25									25										
26										26										26									26										
27										27										27									27										
28										28										28									28										
29										29										29									29										
30										30										30									30										
31										31										31									31										
32										32										32									32										
33										33										33									33										
34										34										34									34										
35										35										35									35										
36										36										36									36										
37										37										37									37										
38										38										38									38										
39										39										39									39										
40										40										40									40										
41										41										41									41										
42										42										42									42										
43										43										43									43										
44										44										44									44										
45										45										45									45										
46										46										46									46										
47										47										47									47										
48										48										48									48										
49										49										49									49										
50										50										50									50										
51										51										51									51										

Figure D.1: COMPACT downlink 52-multiframe structure using 4 time groups for nominal cells (based on an assignment of 1 CPBCC and 3 CPCCCHs with NIB_CPBCCH_0 = NIB_CCCH_1 = NIB_CCCH_2 = NIB_CCCH_3 = 4). NIB_CCCH is not broadcast for serving cell time group.

NOTE: For uplink 52-multiframe structure (based on an assignment of 16 prioritized CPRACHs, see subclause 6.3.2.2.3a), replace B() by R() where R() denotes CPRACH, move down one block, and rotate according to subclause 6.3.2.1. Replace C() by R() and move down one block. CPRACH in general can be mapped as PRACH in clause 7 Table 6.

Frames 0-51 of a 206-multiframe							
MFN = 0							
TG = 0							
TS	0	1	2	3	4	5	6
FN	0	1	2	3	4	5	6
0	B(0) ⁰	X ¹	X ²				
1	B(0) ⁰	X ¹	X ²				
2	B(0) ⁰	X ¹	X ²				
3	B(0) ⁰	X ¹	X ²				
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
34							
35							
36							
37							
38							
39							
40							
41							
42							
43							
44							
45							
46							
47							
48							
49							
50							
51							

Frames 0-51 of a 206-multiframe							
MFN = 0							
TG = 1							
TS	0	1	2	3	4	5	6
FN	0	1	2	3	4	5	6
0	X ⁰	B(0) ¹	X ²				
1	X ⁰	B(0) ¹	X ²				
2	X ⁰	B(0) ¹	X ²				
3	X ⁰	B(0) ¹	X ²				
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
34							
35							
36							
37							
38							
39							
40							
41							
42							
43							
44							
45							
46							
47							
48							
49							
50							
51							

Frames 0-51 of a 206-multiframe							
MFN = 0							
TG = 2							
TS	0	1	2	3	4	5	6
FN	0	1	2	3	4	5	6
0	X ⁰	X ¹	B(0) ²				
1	X ⁰	X ¹	B(0) ²				
2	X ⁰	X ¹	B(0) ²				
3	X ⁰	X ¹	B(0) ²				
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
34							
35							
36							
37							
38							
39							
40							
41							
42							
43							
44							
45							
46							
47							
48							
49							
50							
51							

Figure D.2: COMPACT downlink 52-multiframe structure using 3 time groups for nominal cells (based on an assignment of 1 CPBCH and 3 CPCCHs with NIB_CCCH_0 = NIB_CCCH_1 = NIB_CCCH_2 = 4, NIB_CCCH_3 = 0). NIB_CCCH is not broadcast for serving cell time group.

NOTE: For uplink 52-multiframe structure (based on an assignment of 16 prioritized CPRACHs, see subclause 6.3.2.2.3a), replace B() by R() where R() denotes CPRACH, move down one block, and rotate according to subclause 6.3.2.1. Replace C() by R() and move down one block. CPRACH in general can be mapped as PRACH in Clause 7 Table 6.

Frames 0-51 of a 206-multiframe									Frames 0-51 of a 206-multiframe									Frames 0-51 of a 206-multiframe									Frames 0-51 of a 206-multiframe								
MFN = 0									MFN = 0									MFN = 0									MFN = 0								
TG = 0									TG = 1									TG = 2									TG = 3								
TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7
FN									FN									FN									FN								
0	X	B(0)	X	X	X	X	X	X	0	X	X	X	X	B(0)	X	X	X	0	X	X	X	X	B(0)	X	X	X	0	X	X	X	X	X	X	B(0)	
1	X	B(0)	X	X	X	X	X	X	1	X	X	X	X	B(0)	X	X	X	1	X	X	X	X	B(0)	X	X	X	1	X	X	X	X	X	X	B(0)	
2	X	B(0)	X	X	X	X	X	X	2	X	X	X	X	B(0)	X	X	X	2	X	X	X	X	B(0)	X	X	X	2	X	X	X	X	X	X	B(0)	
3	X	B(0)	X	X	X	X	X	X	3	X	X	X	X	B(0)	X	X	X	3	X	X	X	X	B(0)	X	X	X	3	X	X	X	X	X	X	B(0)	
4									4									4								4									
5									5									5								5									
6									6									6								6									
7									7									7								7									
8									8									8								8									
9									9									9								9									
10									10									10								10									
11									11									11								11									
12									12									12								12									
13	X	X	X	X	X	X	X	C(9)	13	X	C(9)	X	X	X	X	X	X	13	X	X	X	C(9)	X	X	X	13	X	X	X	X	C(9)	X	X	X	
14	X	X	X	X	X	X	X	C(9)	14	X	C(9)	X	X	X	X	X	X	14	X	X	X	C(9)	X	X	X	14	X	X	X	X	C(9)	X	X	X	
15	X	X	X	X	X	X	X	C(9)	15	X	C(9)	X	X	X	X	X	X	15	X	X	X	C(9)	X	X	X	15	X	X	X	X	C(9)	X	X	X	
16	X	X	X	X	X	X	X	C(9)	16	X	C(9)	X	X	X	X	X	X	16	X	X	X	C(9)	X	X	X	16	X	X	X	X	C(9)	X	X	X	
17									17									17								17									
18									18									18								18									
19									19									19								19									
20									20									20								20									
21									21									21								21									
22									22									22								22									
23									23									23								23									
24									24									24								24									
25									25	IDLE	CFCH							25	IDLE	CFCH						25	IDLE	CFCH							
26	X	X	X	X	X	X	X	C(6)	26	X	C(6)	X	X	X	X	X	X	26	X	X	X	C(6)	X	X	X	26	X	X	X	X	C(6)	X	X	X	
27	X	X	X	X	X	X	X	C(6)	27	X	C(6)	X	X	X	X	X	X	27	X	X	X	C(6)	X	X	X	27	X	X	X	X	C(6)	X	X	X	
28	X	X	X	X	X	X	X	C(6)	28	X	C(6)	X	X	X	X	X	X	28	X	X	X	C(6)	X	X	X	28	X	X	X	X	C(6)	X	X	X	
29	X	X	X	X	X	X	X	C(6)	29	X	C(6)	X	X	X	X	X	X	29	X	X	X	C(6)	X	X	X	29	X	X	X	X	C(6)	X	X	X	
30									30									30								30									
31									31									31								31									
32									32									32								32									
33									33									33								33									
34									34									34								34									
35									35									35								35									
36									36									36								36									
37									37									37								37									
38									38									38								38									
39	X	X	X	X	X	X	X	C(9)	39	X	C(9)	X	X	X	X	X	X	39	X	X	X	C(9)	X	X	X	39	X	X	X	X	C(9)	X	X	X	
40	X	X	X	X	X	X	X	C(9)	40	X	C(9)	X	X	X	X	X	X	40	X	X	X	C(9)	X	X	X	40	X	X	X	X	C(9)	X	X	X	
41	X	X	X	X	X	X	X	C(9)	41	X	C(9)	X	X	X	X	X	X	41	X	X	X	C(9)	X	X	X	41	X	X	X	X	C(9)	X	X	X	
42	X	X	X	X	X	X	X	C(9)	42	X	C(9)	X	X	X	X	X	X	42	X	X	X	C(9)	X	X	X	42	X	X	X	X	C(9)	X	X	X	
43									43									43								43									
44									44									44								44									
45									45									45								45									
46									46									46								46									
47									47									47								47									
48									48									48								48									
49									49									49								49									
50									50									50								50									
51									51	IDLE	CSCH							51	IDLE	CSCH						51	IDLE	CSCH							

Figure D.3: COMPACT downlink 52-multiframe structure using 4 time groups for large cells (based on an assignment of 1 CPBCH and 3 CPCCCHs with NIB_CCCH_0 = NIB_CCCH_1 = NIB_CCCH_2 = NIB_CCCH_3 = 4). NIB_CCCH is not broadcast for serving cell time group.

NOTE: For uplink 52-multiframe structure (based on an assignment of 16 prioritized CPRACHs, see subclause 6.3.2.2.3a), replace B() by R() where R() denotes CPRACH, move down one block, and rotate according to subclause 6.3.2.1. Replace C() by R() and move down one block. CPRACH in general can be mapped as PRACH in Clause 7 Table 6.

Frames 0-51 of a 208-multiframe

MFN = 0

TG = 0

TS

0

1

2

3

4

5

6

7

FN

0

X

B(0)

X

X

X

X

X

X

1

X

B(0)

X

X

X

X

X

X

2

X

B(0)

X

X

X

X

X

X

3

X

B(0)

X

X

X

X

X

X

4

5

6

7

8

9

10

11

12

13

X

X

X

X

X

X

X

C(3)

14

X

X

X

X

X

X

C(3)

15

X

X

X

X

X

X

C(3)

16

X

X

X

X

X

X

C(3)

17

18

19

20

21

22

23

24

25

26

X

X

X

X

X

X

X

C(6)

27

X

X

X

X

X

X

C(6)

28

X

X

X

X

X

X

C(6)

29

X

X

X

X

X

X

C(6)

30

31

32

33

34

35

36

37

38

39

X

X

X

X

X

X

X

C(9)

40

X

X

X

X

X

X

C(9)

41

X

X

X

X

X

X

C(9)

42

X

X

X

X

X

X

C(9)

43

44

45

46

47

48

49

50

51

IDLE

CSCH

Frames 0-51 of a 208-multiframe

MFN = 0

TG = 1

TS

0

1

2

3

4

5

6

7

FN

0

X

X

X

B(0)

X

X

X

1

X

X

X

B(0)

X

X

X

2

X

X

X

B(0)

X

X

X

3

X

X

X

B(0)

X

X

X

4

5

6

7

8

9

10

11

12

13

X

C(3)

X

X

X

X

X

X

14

X

C(3)

X

X

X

X

X

X

15

X

C(3)

X

X

X

X

X

X

16

X

C(3)

X

X

X

X

X

X

17

18

19

20

21

22

23

24

25

ID

GPOCH

26

X

C(6)

X

X

X

X

X

X

27

X

C(6)

X

X

X

X

X

X

28

X

C(6)

X

X

X

X

X

X

29

X

C(6)

X

X

X

X

X

X

30

31

32

33

34

35

36

37

38

39

X

C(9)

X

X

X

X

X

X

40

X

C(9)

X

X

X

X

X

X

41

X

C(9)

X

X

X

X

X

X

42

X

C(9)

X

X

X

X

X

X

43

44

45

46

47

48

49

50

51

ID

CSCH

IDLE

Frames 0-51 of a 208-multiframe

MFN = 0

TG = 2

TS

0

1

2

3

4

5

6

7

FN

0

X

X

X

X

X

B(0)

X

1

X

X

X

X

X

B(0)

X

2

X

X

X

X

X

B(0)

X

3

X

X

X

X

X

B(0)

X

4

5

6

7

8

9

10

11

12

13

X

X

X

X

C(3)

X

X

X

14

X

X

X

X

C(3)

X

X

X

15

X

X

X

X

C(3)

X

X

X

16

X

X

X

X

C(3)

X

X

X

17

18

19

20

21

22

23

24

25

IDLE

GPOCH

26

X

X

X

X

C(6)

X

X

X

27

X

X

X

X

C(6)

X

X

X

28

X

X

X

X

C(6)

X

X

X

29

X

X

X

X

C(6)

X

X

X

30

31

32

33

34

35

36

37

38

39

X

X

X

X

C(9)

X

X

X

40

X

X

X

X

C(9)

X

X

X

41

X

X

X

X

C(9)

X

X

X

42

X

X

X

X

C(9)

X

X

X

43

44

45

46

47

48

49

50

51

IDLE

CSCH

IDLE

Figure D.4: COMPACT downlink 52-multiframe structure using 3 time groups for large cells (based on an assignment of 1 CPBCCCH and 3 CPCCCHs with NIB_CCCH_0 = NIB_CCCH_1 = NIB_CCCH_2 = 4, NIB_CPBCCCH_3 = 0). NIB_CCCH is not broadcast for serving cell time group.

NOTE: For uplink 52-multiframe structure (based on an assignment of 16 prioritized CPRACHs, see subclause 6.3.2.2.3a), replace B() by R() where R() denotes CPRACH, move down one block, and rotate according to subclause 6.3.2.1. Replace C() by R() and move down one block. CPRACH in general can be mapped as PRACH in Clause 7 Table 6.

Frames 0-51 of a 208-multiframe MFN = 0								Frames 52-103 of a 208-multiframe MFN = 1								Frames 104-155 of a 208-multiframe MFN = 2								Frames 156-207 of a 208-multiframe MFN = 3											
TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7
FN	0	1	2	3	4	5	6	7	FN	0	1	2	3	4	5	6	7	FN	0	1	2	3	4	5	6	7	FN	0	1	2	3	4	5	6	7
0	B(0) ¹	X ¹	X ¹	X ¹	X ¹				52	X ¹	X ¹	X ¹	X ¹	B(0) ¹				104	X ¹	X ¹	B(0) ¹	X ¹				156	X ¹	X ¹	B(0) ¹	X ¹	X ¹				
1	B(0) ¹	X ¹	X ¹	X ¹	X ¹				53	X ¹	X ¹	X ¹	X ¹	B(0) ¹				105	X ¹	X ¹	B(0) ¹	X ¹				157	X ¹	X ¹	B(0) ¹	X ¹	X ¹				
2	B(0) ¹	X ¹	X ¹	X ¹	X ¹				54	X ¹	X ¹	X ¹	X ¹	B(0) ¹				106	X ¹	X ¹	B(0) ¹	X ¹				158	X ¹	X ¹	B(0) ¹	X ¹	X ¹				
3	B(0) ¹	X ¹	X ¹	X ¹	X ¹				55	X ¹	X ¹	X ¹	X ¹	B(0) ¹				107	X ¹	X ¹	B(0) ¹	X ¹				159	X ¹	X ¹	B(0) ¹	X ¹	X ¹				
4									56									108								160									
5									57									109								161									
6									58									110								162									
7									59									111								163									
8									60									112								164									
9									61									113								165									
10									62									114								166									
11									63									115								167									
12									64									116								168									
13		X ¹	X ¹	X ¹	X ¹	C(3) ¹			65	X ¹	X ¹	C(3) ¹	X ¹				117	X ¹	C(3) ¹	X ¹	X ¹	X ¹			169	C(3) ¹	X ¹	X ¹	X ¹	X ¹					
14	X ¹	X ¹	X ¹	X ¹	X ¹	C(3) ¹			66	X ¹	X ¹	C(3) ¹	X ¹				118	X ¹	C(3) ¹	X ¹	X ¹	X ¹			170	C(3) ¹	X ¹	X ¹	X ¹	X ¹					
15	X ¹	X ¹	X ¹	X ¹	X ¹	C(3) ¹			67	X ¹	X ¹	C(3) ¹	X ¹				119	X ¹	C(3) ¹	X ¹	X ¹	X ¹			171	C(3) ¹	X ¹	X ¹	X ¹	X ¹					
16	X ¹	X ¹	X ¹	X ¹	X ¹	C(3) ¹			68	X ¹	X ¹	C(3) ¹	X ¹				120	X ¹	C(3) ¹	X ¹	X ¹	X ¹			172	C(3) ¹	X ¹	X ¹	X ¹	X ¹					
17									69								121								173										
18									70								122								174										
19									71								123								175										
20									72								124								176										
21									73								125								177										
22									74								126								178										
23									75								127								179										
24									76								128								180										
25									77								129								181										
26									78								130	X ¹	C(6) ¹	X ¹	X ¹	X ¹			182	C(6) ¹	X ¹	X ¹	X ¹	X ¹					
27	X ¹	X ¹	X ¹	X ¹	X ¹	C(6) ¹			79	X ¹	X ¹	X ¹	X ¹	C(6) ¹			131	X ¹	C(6) ¹	X ¹	X ¹	X ¹			183	C(6) ¹	X ¹	X ¹	X ¹	X ¹					
28	X ¹	X ¹	X ¹	X ¹	X ¹	C(6) ¹			80	X ¹	X ¹	X ¹	X ¹	C(6) ¹			132	X ¹	C(6) ¹	X ¹	X ¹	X ¹			184	C(6) ¹	X ¹	X ¹	X ¹	X ¹					
29	X ¹	X ¹	X ¹	X ¹	X ¹	C(6) ¹			81	X ¹	X ¹	X ¹	X ¹	C(6) ¹			133	X ¹	C(6) ¹	X ¹	X ¹	X ¹			185	C(6) ¹	X ¹	X ¹	X ¹	X ¹					
30									82								134								186										
31									83								135								187										
32									84								136								188										
33									85								137								189										
34									86								138								190										
35									87								139								191										
36									88								140								192										
37									89								141								193										
38									90								142								194										
39									91	X ¹	X ¹	X ¹	C(9) ¹	X ¹			143	X ¹	C(9) ¹	X ¹	X ¹	X ¹			195	C(9) ¹	X ¹	X ¹	X ¹	X ¹					
40	X ¹	X ¹	X ¹	X ¹	X ¹	C(9) ¹			92	X ¹	X ¹	X ¹	C(9) ¹	X ¹			144	X ¹	C(9) ¹	X ¹	X ¹	X ¹			196	C(9) ¹	X ¹	X ¹	X ¹	X ¹					
41	X ¹	X ¹	X ¹	X ¹	X ¹	C(9) ¹			93	X ¹	X ¹	X ¹	C(9) ¹	X ¹			145	X ¹	C(9) ¹	X ¹	X ¹	X ¹			197	C(9) ¹	X ¹	X ¹	X ¹	X ¹					
42	X ¹	X ¹	X ¹	X ¹	X ¹	C(9) ¹			94	X ¹	X ¹	X ¹	C(9) ¹	X ¹			146	X ¹	C(9) ¹	X ¹	X ¹	X ¹			198	C(9) ¹	X ¹	X ¹	X ¹	X ¹					
43									95								147								199										
44									96								148								200										
45									97								149								201										
46									98								150								202										
47									99								151								203										
48									100								152								204										
49									101								153								205										
50									102								154								206										
51									103								155								207	ID	GSCH ¹								
									104								156								208										

Figure D.5: Example of COMPACT downlink timeslot mapping and rotation of control channels using 4 time groups for nominal cells (based on an assignment of 1 CPBCC and 3 CPCCCHs with NIB_CCCH_0 = NIB_CCCH_1 = NIB_CCCH_2 = NIB_CCCH_3 = 4). TG = 0 is illustrated. NIB_CCCH is not broadcast for serving cell time group.

NOTE: For uplink 52-multiframe structure (based on an assignment of 16 prioritized CPRACHs, see subclause 6.3.2.2.3a), replace B() by R() where R() denotes CPRACH, move down one block, and rotate according to subclause 6.3.2.1. Replace C() by R() and move down one block. CPRACH in general can be mapped as PRACH in Clause 7 Table 6.

Frames 0-51 of a 208-multiframe MFN = 0								Frames 52-103 of a 208-multiframe MFN = 1								Frames 104-155 of a 208-multiframe MFN = 2								Frames 156-207 of a 208-multiframe MFN = 3											
TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7
FN									FN									FN									FN								
0	B(0) ¹	X ¹	X ²						52	X ¹	X ²						B(0) ¹	104	X ¹							156			B(0) ¹	X ¹	X ²				
1	B(0) ¹	X ¹	X ²						53	X ¹	X ²						B(0) ¹	105	X ¹							157			B(0) ¹	X ¹	X ²				
2	B(0) ¹	X ¹	X ²						54	X ¹	X ²						B(0) ¹	106	X ¹							158			B(0) ¹	X ¹	X ²				
3	B(0) ¹	X ¹	X ²						55	X ¹	X ²						B(0) ¹	107	X ¹							159			B(0) ¹	X ¹	X ²				
4									56									108								160									
5									57									109								161									
6									58									110								162									
7									59									111								163									
8									60									112								164									
9									61									113								165									
10									62									114								166									
11									63									115								167									
12	PTCOCH								64	PTCOCH								116	PTCOCH								168	PTCOCH							
13	X ¹	X ²					C(3) ¹		65	X ²						C(3) ¹	X ¹	117							C(3) ¹	X ¹	X ²								
14	X ¹	X ²					C(3) ¹		66	X ²						C(3) ¹	X ¹	118							C(3) ¹	X ¹	X ²								
15	X ¹	X ²					C(3) ¹		67	X ²						C(3) ¹	X ¹	119							C(3) ¹	X ¹	X ²								
16	X ¹	X ²					C(3) ¹		68	X ²						C(3) ¹	X ¹	120							C(3) ¹	X ¹	X ²								
17									69									121									171								
18									70									122									172								
19									71									123									173								
20									72									124									174								
21									73									125									175								
22									74									126									176								
23									75									127									177								
24									76									128									178								
25	IDLE								77	IDLE								129	IDLE								179	IDLE							
26	X ¹	X ²					C(6) ¹		78	X ²						C(6) ¹	X ¹	130							C(6) ¹	X ¹	X ²								
27	X ¹	X ²					C(6) ¹		79	X ²						C(6) ¹	X ¹	131							C(6) ¹	X ¹	X ²								
28	X ¹	X ²					C(6) ¹		80	X ²						C(6) ¹	X ¹	132							C(6) ¹	X ¹	X ²								
29	X ¹	X ²					C(6) ¹		81	X ²						C(6) ¹	X ¹	133							C(6) ¹	X ¹	X ²								
30									82									134									181								
31									83									135									182								
32									84									136									183								
33									85									137									184								
34									86									138									185								
35									87									139									186								
36									88									140									187								
37									89									141									188								
38	PTCOCH								90	PTCOCH								142	PTCOCH								189	PTCOCH							
39	X ¹	X ²					C(9) ¹		91	X ²						C(9) ¹	X ¹	143								C(9) ¹	X ¹	X ²							
40	X ¹	X ²					C(9) ¹		92	X ²						C(9) ¹	X ¹	144								C(9) ¹	X ¹	X ²							
41	X ¹	X ²					C(9) ¹		93	X ²						C(9) ¹	X ¹	145								C(9) ¹	X ¹	X ²							
42	X ¹	X ²					C(9) ¹		94	X ²						C(9) ¹	X ¹	146								C(9) ¹	X ¹	X ²							
43									95									147									191								
44									96									148									192								
45									97									149									193								
46									98									150									194								
47									99									151									195								
48									100									152									196								
49									101									153									197								
50									102									154									198								
51	IDLE								103	IDLE								104	IDLE								199	IDLE							
									105	CSCH ¹								106	CSCH ¹								200	IDLE							
									107									108									201								
									109									109									202								
									110									110									203								
									111									111									204								
									112									112									205								
									113									113									206								
									114									114									207								
									115									115									208								
									116									116									209								
									117									117									210								
									118									118									211								
									119									119									212								
									120									120									213								
									121									121																	

Frames 0-51 of a 208-multiframe MFN = 0									Frames 52-103 of a 208-multiframe MFN = 1									Frames 104-155 of a 208-multiframe MFN = 2									Frames 156-207 of a 208-multiframe MFN = 3								
TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7	TS	0	1	2	3	4	5	6	7
FN									FN									FN									FN								
0	B(0) ¹	X ¹	X ²	X ³	X ⁴	X ⁵			52	X ¹	X ²	X ³	X ⁴	B(0) ¹				104	X ¹	X ²	X ³	B(0) ¹	X ¹			156	X ²	B(0) ¹	X ¹	X ³	X ⁴				
1	B(0) ¹	X ¹	X ²	X ³	X ⁴	X ⁵			53	X ¹	X ²	X ³	X ⁴	B(0) ¹				105	X ¹	X ²	X ³	B(0) ¹	X ¹			157	X ¹	X ²	X ³	X ⁴	X ⁵				
2	B(0) ¹	X ¹	X ²	X ³	X ⁴	X ⁵			54	X ¹	X ²	X ³	X ⁴	B(0) ¹				106	X ¹	X ²	X ³	B(0) ¹	X ¹			158	X ²	X ³	B(0) ¹	X ¹	X ³	X ⁴			
3	B(0) ¹	X ¹	X ²	X ³	X ⁴	X ⁵			55	X ¹	X ²	X ³	X ⁴	B(0) ¹				107	X ¹	X ²	X ³	B(0) ¹	X ¹			159	X ²	B(0) ¹	X ¹	X ³	X ⁴				
4	X ¹								56					X ¹				108				X ¹				160		X ¹							
5	X ¹								57					X ¹				109				X ¹				161		X ¹							
6	X ¹								58					X ¹				110				X ¹				162		X ¹							
7	X ¹								59					X ¹				111				X ¹				163		X ¹							
8									60					X ¹				112				X ¹				164		X ¹							
9									61					X ¹				113				X ¹				165		X ¹							
10									62					X ¹				114				X ¹				166		X ¹							
11									63					X ¹				115				X ¹				167		X ¹							
12	PTCOH								64	PTCOH								116	PTCOH								168	PTCOH							
13	X ¹	X ²	X ³	X ⁴	X ⁵	C(3) ¹			65	X ¹	X ²	X ³	C(3) ¹	X ¹				117	X ¹	C(3) ¹	X ¹	X ²	X ³			169	C(3) ¹	X ¹	X ²	X ³	X ⁴				
14	X ¹	X ²	X ³	X ⁴	X ⁵	C(3) ¹			66	X ¹	X ²	X ³	C(3) ¹	X ¹				118	X ¹	C(3) ¹	X ¹	X ²	X ³			170	C(3) ¹	X ¹	X ²	X ³	X ⁴				
15	X ¹	X ²	X ³	X ⁴	X ⁵	C(3) ¹			67	X ¹	X ²	X ³	C(3) ¹	X ¹				119	X ¹	C(3) ¹	X ¹	X ²	X ³			171	C(3) ¹	X ¹	X ²	X ³	X ⁴				
16	X ¹	X ²	X ³	X ⁴	X ⁵	C(3) ¹			68	X ¹	X ²	X ³	C(3) ¹	X ¹				120	X ¹	C(3) ¹	X ¹	X ²	X ³			172	C(3) ¹	X ¹	X ²	X ³	X ⁴				
17									69									121								173									
18									70									122								174									
19									71									123								175									
20									72									124								176									
21									73									125								177									
22									74									126								178									
23									75									127								179									
24									76									128								180									
25	IDLE								77	IDLE								129	IDLE								181	ID							
26	X ¹	X ²	X ³	X ⁴	X ⁵	C(6) ¹			78	X ¹	X ²	X ³	C(6) ¹	X ¹				130	X ¹	C(6) ¹	X ¹	X ²	X ³			182	C(6) ¹	X ¹	X ²	X ³	X ⁴				
27	X ¹	X ²	X ³	X ⁴	X ⁵	C(6) ¹			79	X ¹	X ²	X ³	C(6) ¹	X ¹				131	X ¹	C(6) ¹	X ¹	X ²	X ³			183	C(6) ¹	X ¹	X ²	X ³	X ⁴				
28	X ¹	X ²	X ³	X ⁴	X ⁵	C(6) ¹			80	X ¹	X ²	X ³	C(6) ¹	X ¹				132	X ¹	C(6) ¹	X ¹	X ²	X ³			184	C(6) ¹	X ¹	X ²	X ³	X ⁴				
29	X ¹	X ²	X ³	X ⁴	X ⁵	C(6) ¹			81	X ¹	X ²	X ³	C(6) ¹	X ¹				133	X ¹	C(6) ¹	X ¹	X ²	X ³			185	C(6) ¹	X ¹	X ²	X ³	X ⁴				
30									82									134								186									
31									83									135								187									
32									84									136								188									
33									85									137								189									
34									86									138								190									
35									87									139								191									
36									88									140								192									
37									89									141								193									
38									90									142								194									
39	X ¹	X ²	X ³	X ⁴	X ⁵	C(9) ¹			91	X ¹	X ²	X ³	C(9) ¹	X ¹				143	X ¹	C(9) ¹	X ¹	X ²	X ³			195	C(9) ¹	X ¹	X ²	X ³	X ⁴				
40	X ¹	X ²	X ³	X ⁴	X ⁵	C(9) ¹			92	X ¹	X ²	X ³	C(9) ¹	X ¹				144	X ¹	C(9) ¹	X ¹	X ²	X ³			196	C(9) ¹	X ¹	X ²	X ³	X ⁴				
41	X ¹	X ²	X ³	X ⁴	X ⁵	C(9) ¹			93	X ¹	X ²	X ³	C(9) ¹	X ¹				145	X ¹	C(9) ¹	X ¹	X ²	X ³			197	C(9) ¹	X ¹	X ²	X ³	X ⁴				
42	X ¹	X ²	X ³	X ⁴	X ⁵	C(9) ¹			94	X ¹	X ²	X ³	C(9) ¹	X ¹				146	X ¹	C(9) ¹	X ¹	X ²	X ³			198	C(9) ¹	X ¹	X ²	X ³	X ⁴				
43									95									147								199									
44									96									148								200									
45									97									149								201									
46									98									150								202									
47									99									151								203									
48									100									152								204									
49									101									153								205									
50									102									154								206									
51	IDLE								103	IDLE								155	IDLE								207	ID							

Figure D.7: Example of COMPACT downlink timeslot mapping and rotation of control channels using 4 time groups for nominal cells (based on an assignment of 1 CPBCH and 3 CPCCCHs with NIB_CCCH_0 = NIB_CCCH_2 = NIB_CCCH_3 = 4, NIB_CCCH_1 = 5). TG = 0 is illustrated. NIB_CCCH is not broadcast for serving cell time group.

NOTE: For uplink 52-multiframe structure (based on an assignment of 16 prioritized CPRACHs, see subclause 6.3.2.2.3a), replace B() by R() where R() denotes CPRACH, move down one block, and rotate according to subclause 6.3.2.1. Replace C() by R() and move down one block. CPRACH in general can be mapped as PRACH in Clause 7 Table 6.

CLAIMS

What is claimed is:

1. A method for enabling the introduction of a 200kHz GSM-type network into a TDMA system having a bandwidth that is substantially less than a 2.5MHz bandwidth normally employed for GSM-type networks, comprising the steps of:

providing a 52-multiframe containing 12 blocks of four consecutive frames, two idle frames, and two channels used for control channel purposes; and

rotating control channels belonging to a serving time group over every other timeslot number.

2. A method as in claim 1, wherein the rotation occurs over odd timeslot numbers as 7, 5, 3, 1, 7, 5, ..., etc., and where the rotation occurs between frame numbers (FN) mod 52 = 3 and 4.

3. A method as in claim 1, wherein a mapping of the control channels on timeslot numbers is defined by the following formula:

For $0 \leq \text{FN mod } 52 \leq 3$, $\text{TN} = ((6 \times ((\text{FN div } 52) \text{ mod } 4)) + 1 + (2 \times \text{TG})) \text{ mod } 8$; and

For $4 \leq \text{FN mod } 52 \leq 51$, $\text{TN} = ((6 \times ((\text{FN div } 52) \text{ mod } 4)) + 7 + (2 \times \text{TG})) \text{ mod } 8$,

where TG is a time group value.

4. A method as in claim 1, wherein information specifying at least the rotation direction is signalled to the mobile station in a downlink synchronization channel.

09575033.051900

5. A wireless TDMA digital communications system, comprising:

at least one mobile station; and

a plurality of base transceiver stations individual ones of which are capable of transmitting packet data to, and receiving packet data from, said mobile station using a 52-multiframe, wherein individual ones of said base transceiver stations rotate the transmission of control channels belonging to a serving time group over every other timeslot number for enabling said mobile station to perform reselection measurements on neighboring base transceiver stations without dropping traffic.

6. A system as in claim 5, wherein the rotation occurs between frame numbers (FN) mod 52 = 3 and 4.

7. A system as in claim 5, wherein a mapping of the control channels on timeslot numbers is defined by the following formula:

For $0 \leq \text{FN} \text{ mod } 52 \leq 3$, $\text{TN} = ((6 \times ((\text{FN} \text{ div } 52) \text{ mod } 4)) + 1 + (2 \times \text{TG})) \text{ mod } 8$; and

For $4 \leq \text{FN} \text{ mod } 52 \leq 51$, $\text{TN} = ((6 \times ((\text{FN} \text{ div } 52) \text{ mod } 4)) + 7 + (2 \times \text{TG})) \text{ mod } 8$,

where TG is a time group value.

8. A system as in claim 5, wherein information specifying at least the rotation direction is signalled to the mobile station in a downlink synchronization channel.

9. A system as in claim 5, wherein the rotation of the control channels occurs in odd timeslot numbers as 7, 5, 3, 1, 7, 5, ..., etc.



006150.0052560

ENHANCEMENTS TO THE 3-CARRIER COMPACT
SOLUTION FOR IS136HS


ABSTRACT OF THE DISCLOSURE

A method enables the introduction of a 200kHz GSM-type network into a TDMA system having a bandwidth that is substantially less than a 2.5MHz bandwidth normally employed for GSM-type networks. The method provides a 52-multiframe containing 12 blocks of four consecutive frames, two idle frames, and two control channels, and rotates the control channels belonging to a serving time group over odd timeslot numbers as 7, 5, 3, 1, 7, 5, ..., etc. Preferably the rotation occurs between frame numbers $(FN) \bmod 52 = 3$ and 4. Information specifying at least the rotation direction is signalled to the mobile station in a downlink synchronization channel.

006150-33557560

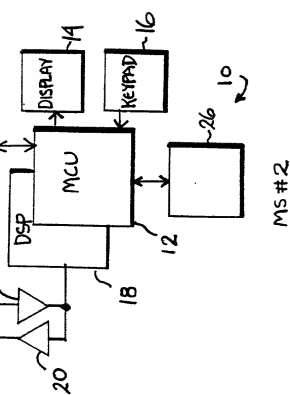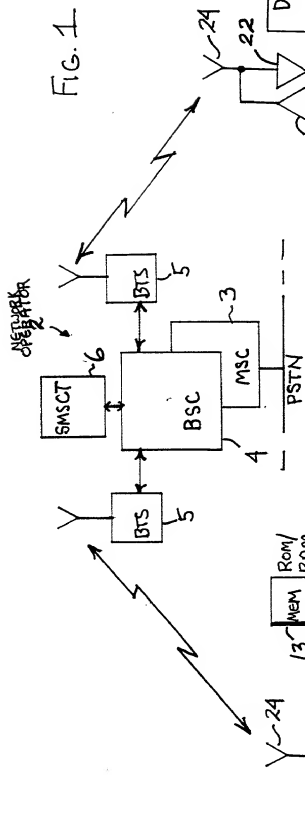

52 TDMA Frames



X = Idle frame
B0 - B11 = Radio blocks

Channel designation	Sub-channel number	Direction	Allowable time-slot assignment	Allowable RF channel assignment	Burst type	Repeat length in TDMA frames	Interleaved block TDMA frame mapping
PDTCH, PACCH		D&U	0...7	CO...Cn	NB1	52	B0(0...3), B1(4...7), B2(8...11), B3(13...16), B4(17...20), B5(21...24), B6(25...29), B7(30...33), B8(34...37), B9(38...42), B10(43...46), B11(47...50)
PBCH		D	0...7	CO...Cn	NB	52	B0(0...3), B3(13...16), B6(25...29), B9(38...42)
PRACH		U	0...7	CO...Cn	AB	52	B0(0...3), B11(11), B12(13...B22(24), B24(26)...B35(37), B36(39)...B47(50)
PPCH, PNCH		D	0...7	CO...Cn	NB	52	B1(4...7), B2(8...11), B3(13...16), B4(17...20), B5(21...24), B6(25...29), B7(30...33), B8(34...37), B9(38...42), B10(43...46), B11(47...50)
PAGCH		D	0...7	CO...Cn	NB	52	B0(0...3), B1(4...7), B2(8...11), B3(13...16), B4(17...20), B5(21...24), B6(25...29), B7(30...33), B8(34...37), B9(38...42), B10(43...46), B11(47...50)
PTCH/D		D	0...7	CO...Cn	NB	416	B0(12,38,64,90), B1(116,142,168,194), B2(220,246,272,298), B3(324,350,376,402)
PTCH/U	0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15	U	0...7	CO...Cn	AB	416	B0(12) B0(38) B0(64) B0(90) B0(116) B0(142) B0(168) B0(194) B0(220) B0(246) B0(272) B0(298) B0(324) B0(350) B0(376) B0(402)

Fig. 3 Mapping of logical channels onto physical channels